TDS技术数据表 Technical Data Sheet

NX-313 固色剂 Dye-fixing Agent

产品编号 Product Number	NX-313	制表人 Data Sheet maker	涂苏青 Tu Suqing	制表日期 Date	2026年1月

一、产品用途与特性 Product Usage and Characteristics

本产品对鞋面脱色、透色有良好的固色效果，在行业中收获良好口碑。
This product has good color fixation effect, sepecial for anti-color bleeding of upper, gained the good reputation in the industry

二、产品技术指标 Product Technical Indicators

产品型号 Production Number	NX-313
外观 Appearance	淡黄色粘稠液体 Light yellow thick liquid
粘度 Viscosity	500±100
干燥条件 Drying conditions	65-70℃ 5-8分钟Mins
储存期（5-35℃） Storage period	6个月（5-35℃） 6 months

三、产品使用指引 Product Usage Guidelines

1.使用前摇晃均匀。
Shake evenly before use.

2.对需要固色处理鞋面划线除尘，用毛刷均匀涂刷于材料，温度稍高、完全干燥进行下一工序.
Remove dust for vamp that needs to be fixed color treatment, evenly brush the material with a brush, slightly higher temperature, completely dry for the next process.
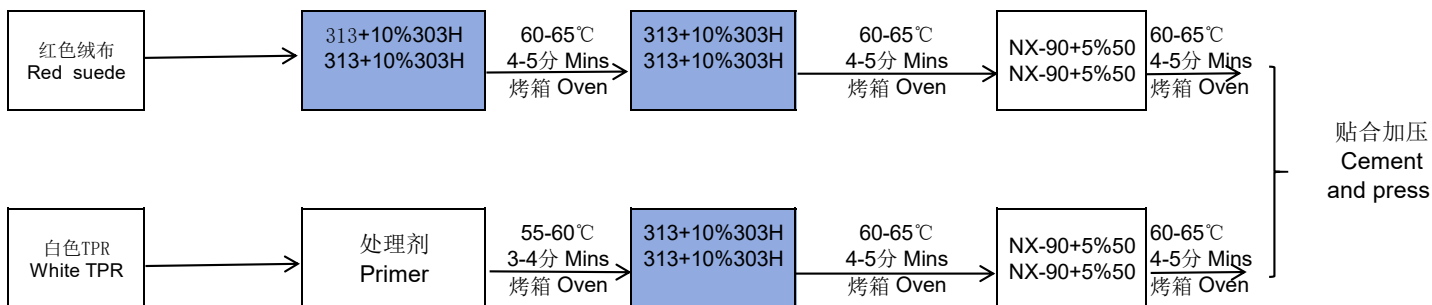
3.固色剂与防溢色依比例配合使用，并于2H用完为宜.
Dyeing- fixing agent and anti-color bleeding should be used in proportion, and used up within 2 hours.

4.处理剂均匀涂刷到位，不能缺胶和积胶.
 Evenly brush the primer in place without lack of glue and adhesive deposit.

四、使用流程 Application Process

红色绒布 Red suede	→	313+10%303H 313+10%303H	60-65℃ 4-5分 Mins 烤箱 Oven	313+10%303H 313+10%303H	60-65℃ 4-5分 Mins 烤箱 Oven	NX-90+5%50 NX-90+5%50	60-65℃ 4-5分 Mins 烤箱 Oven	贴合加压 Cement and press
白色TPR White TPR	→	处理剂 Primer	55-60℃ 3-4分 Mins 烤箱 Oven	313+10%303H 313+10%303H	60-65℃ 4-5分 Mins 烤箱 Oven	NX-90+5%50 NX-90+5%50	60-65℃ 4-5分 Mins 烤箱 Oven	

TDS技术数据表 Technical Data Sheet

五、注意事项 Attention：

1.准确辨别材质，选用适用的产品。
Accurately identify the material and choose the appropriate products.

2.大量使用前先试胶确认。
Please do the adhesive trial SOP confirmation before mass production.

3.储存于阴凉处，避免阳光直接辐射，适用温度5-35℃.
Store in a shade place, avoid direct sunlight, and keep at a temperature between 5–35°C.

4.该物质内含有机溶剂，远离火源、食品，贮存容器应密封。
This product contains organic solvent. Keep away from fire and food, and ensure the storage container is tightly sealed.

5.上述储存条件下，使用期限6个月，超过储存期，必须经过详细物理测试确认后方可使用。
Under the above storage conditions, the period is 6 months. Beyond the storage period, it can only be used after detailed physical test and confirmation.

6.操作人员须佩戴个人防护用品。
Operators must wear personal protective equipment.

7.详细资料请参照MSDS资料。
Please refer to MSDs for details.