

TDS 技术数据表 Technical Data Sheet

NX-747 尼龙处理剂 Nylon Primer

产品编号 Product Number	NX-747	制表人 Data Sheet maker	涂苏青 Tu Suqing	制表日期 Date	2026年1月
------------------------	--------	-------------------------	------------------	--------------	---------

一、产品用途与特性 Product Usage and Characteristics

1. 本产品对尼龙材质有很好的接着效果。

This product has a good adhesion effect on nylon material.

2. 操作简单，综合性能好。

Simple operation and good comprehensive performance.

二、产品技术指标 Product Technical Indicators

产品型号 Production Number	NX-747
外观 Appearance	无色透明液体 Colorless Transparent Liquid
干燥条件 Drying conditions	65±5℃ 2-4分 65±5℃ 2-4Minutes
储存期 (5-35℃) Storage period	6个月 (5-35℃) 6 months

三、产品使用指引 Product Usage Guidelines

1. 使用前添加5-8%RFE硬化剂，深色材质添加RFE，浅色材质添加RHE搅拌均匀。

Add 5-8% RFE hardener and mix evenly, RFE for dark materials and RHE for light materials before use.


2. 用毛刷或白棉布均匀涂刷于鞋材表面。

Brush evenly on the surface of shoes with a brush or white cotton cloth.

3. 不同材质干燥条件不同，依实际情况确定。

The drying conditions of different materials are different, which shall be determined according to the actual situation.

四、使用流程 Application Process

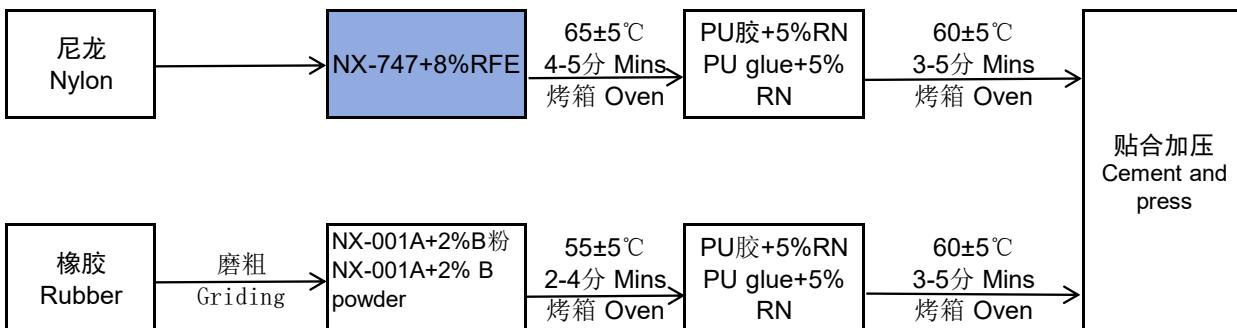

TDS技术数据表 Technical Data Sheet

五、注意事项 Attention:

1.准确辨别材质，选用适用的产品。

Accurately identify the material and choose the appropriate products.

2.大量使用前先试胶确认。

Please do the adhesive trial SOP confirmation before mass production.

3.储存于阴凉处，避免阳光直接辐射，适用温度5-35°C。

Store in a shade place, avoid direct sunlight, and keep at a temperature between 5–35°C.

4.该物质内含有机溶剂，远离火源、食品，贮存容器应密封。

This product contains organic solvent. Keep away from fire and food, and ensure the storage container is tightly sealed.

5.上述储存条件下，使用期限6个月，超过储存期，必须经过详细物理测试确认后方可使用。

Under the above storage conditions, the period is 6 months. Beyond the storage period, it can only be used after detailed physical test and confirmation.

6.操作人员须佩戴个人防护用品。

Operators must wear personal protective equipment.

7.详细资料请参照MSDS资料。

Please refer to MSDs for details.