



# TDS技术数据表 Technical Data Sheet

## NX-RFE 硬化剂 Hardener

产品编号 Product Number	NX-RFE	制表人 Data Sheet maker	涂苏青 Tu Suqing	制表日期 Date	2026年1月
------------------------	--------	-------------------------	------------------	--------------	---------

### 一、产品用途与特性 Product Usage and Characteristics

1. 本产品为硫化磷酸三苯基异氰酸酯、乙酸乙酯光催化而成。  
This product is made of sulfurized phosphoric acid triphenyl isocyanate and ethyl acetate.
2. 本产品具有抗油性、抗拉丝、耐热性等超强性能。  
This product has good performance of oil resistance, wire drawing resistance, heat resistance, etc.


### 二、产品技术指标 Product Technical Indicators

产品型号 Production Number	NX-RFE
外观 Appearance	黄色液体 Light yellow liquid
干燥条件 Drying conditions	65±5℃ 4-5分 65±5℃ 4-5Minutes
储存期 (5-35℃) Storage period	6个月 (5-35℃) 6 months

### 三、产品使用指引 Product Usage Guidelines

1. 本产品一般情况下，配合处理剂使用。  
Generally, this product is used in combination with primer.
2. 使用后及时加盖密封，避免吸收水份影响效果。  
Please seal in time after use to avoid effect of water absorption.

### 四、使用流程 Application Process

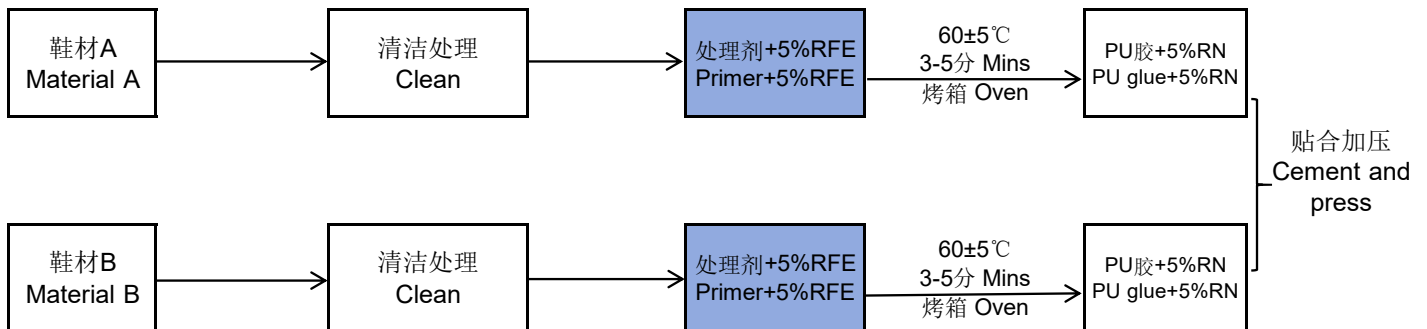



## TDS技术数据表 Technical Data Sheet

### 五、注意事项 Attention:

1.准确辨别材质，选用适用的产品。

Accurately identify the material and choose the appropriate products.

2.大量使用前先试胶确认。

Please do the adhesive trial SOP confirmation before mass production.

3.储存于阴凉处，避免阳光直接辐射，适用温度5-35°C.

Store in a shade place, avoid direct sunlight, and keep at a temperature between 5–35°C.

4.该物质内含易燃有机溶剂，远离火源、食品，贮存容器应密封。

This product contains flammable organic solvent. Keep away from fire and food, and ensure the storage container is tightly sealed.

5.上述储存条件下，使用期限6个月，超过储存期，必须经过详细物理测试确认后方可使用。

Under the above storage conditions, the period is 6 months. Beyond the storage period, it can only be used after detailed physical test and confirmation.

6.操作人员须佩戴个人防护用品。

Operators must wear personal protective equipment.

7.具体使用方法可根据现场试胶情况制定使用流程。

The specific usage method can be formulated based on the on-site trial glue conditions.

8.详细资料请参照MSDS资料。

Please refer to MSDs for details.